

RAYTORC


HYDRAULIC TORQUE WRENCH WMS SQUARE DRIVE

油圧トルクレンチ WMS シリーズ


Product Introductions

The WMS-Series square drive hydraulic torque wrenches are compact, easy to use and versatile.

The titanium-aluminum all alloy and super high strength steel alloy construction means increased strength and durability while minimizing weight. WMS-Series torque wrench are available in 3/4" to 2 1/2" square drive models, with a torque range from 164 to 69,247 Newton meter (121 to 51,105 ft/lbs). All models are fitted with a 360° swivel coupler and screw couplings.

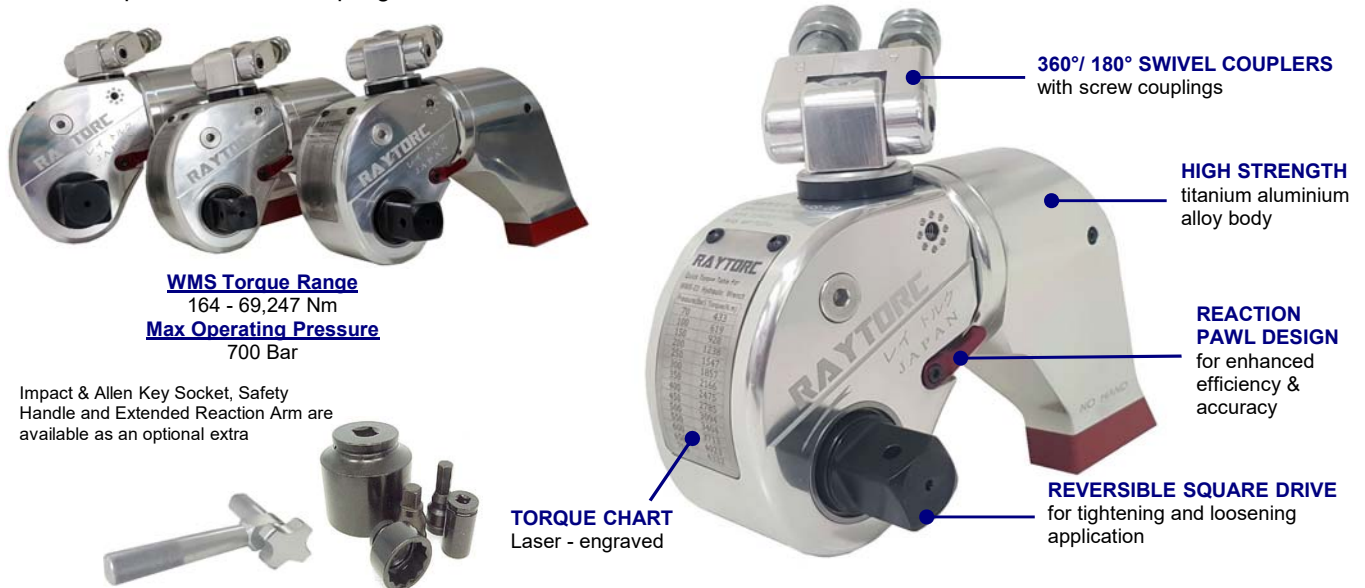

Product Sheet

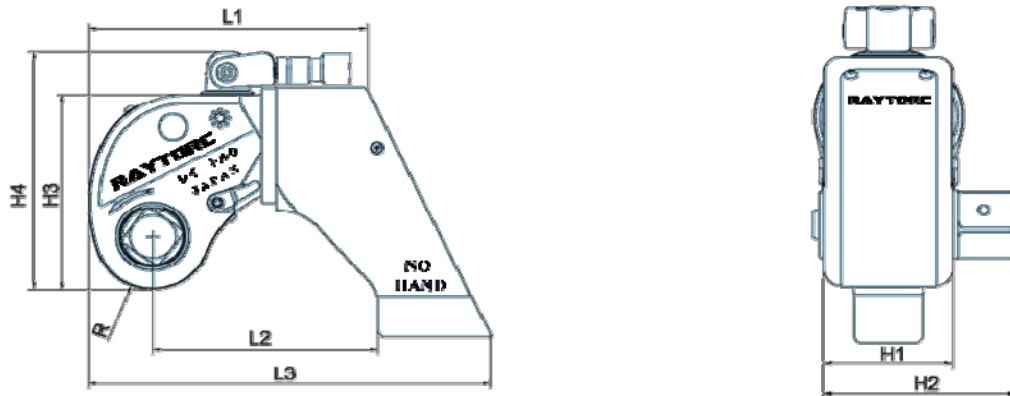

Specification

Model	Square Drive	Range of Torque (Nm) @ 700 bar	L1 (mm)	L2 (mm)	L3 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	R (mm)	Weight (kg)
WMS 1	3/4"	164 - 1,760	130	102	182	52	77	96	133	25.8	2
WMS 3	1"	433 - 4,332	170	140	249	70	98	127	165	34.8	4
WMS 5	1.1/2"	742 - 7,420	202	160	286	81	125	149	184	39.8	7
WMS 8	1.1/2"	1,015 - 10,430	228	184	326	90	134	172	207	46.8	10.6
WMS 10	1.1/2"	1,509 - 15,090	237	192	336	100	144	181	216	50.8	12.9
WMS 15	2.1/2"	1,940 - 19,409	273	223	391	110	164	206	241	56.8	20
WMS 20	2.1/2"	2,504 - 26,447	287	248	433	120	187	221	256	59.8	25
WMS 25	2.1/2"	3,309 - 34,626	323	256	464	138	206	258	293	70.8	33.8
WMS 35	2.1/2"	4,741 - 47,414	351	271	494	153	217	279	315	76.8	43
WMS 50	2.1/2"	6,925 - 69,247	376	295	528	162	226	291	326	78.8	52